

Technical data sheet

Tapered pipe air-termination rod

Item number: 5401993



- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- From a free length of > 2.5 m, an additional fastening, e.g. insulated spacer is recommended
- Last metre is tapered from Ø 16 mm to Ø 10 mm, material: AlMgSi
- Matches stand system FangFix

Alu Aluminium

Master data

| | |
|---------------------|--------------------------|
| Item number | 5401993 |
| Type | 101 VL3500 |
| Description 1 | Tubular interception rod |
| Description 2 | tapered |
| Manufacturer | OBO |
| Dimension | 3,5m |
| Material | Aluminium |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 105 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Tapered pipe air-termination rod

Item number: 5401993



Dimensions

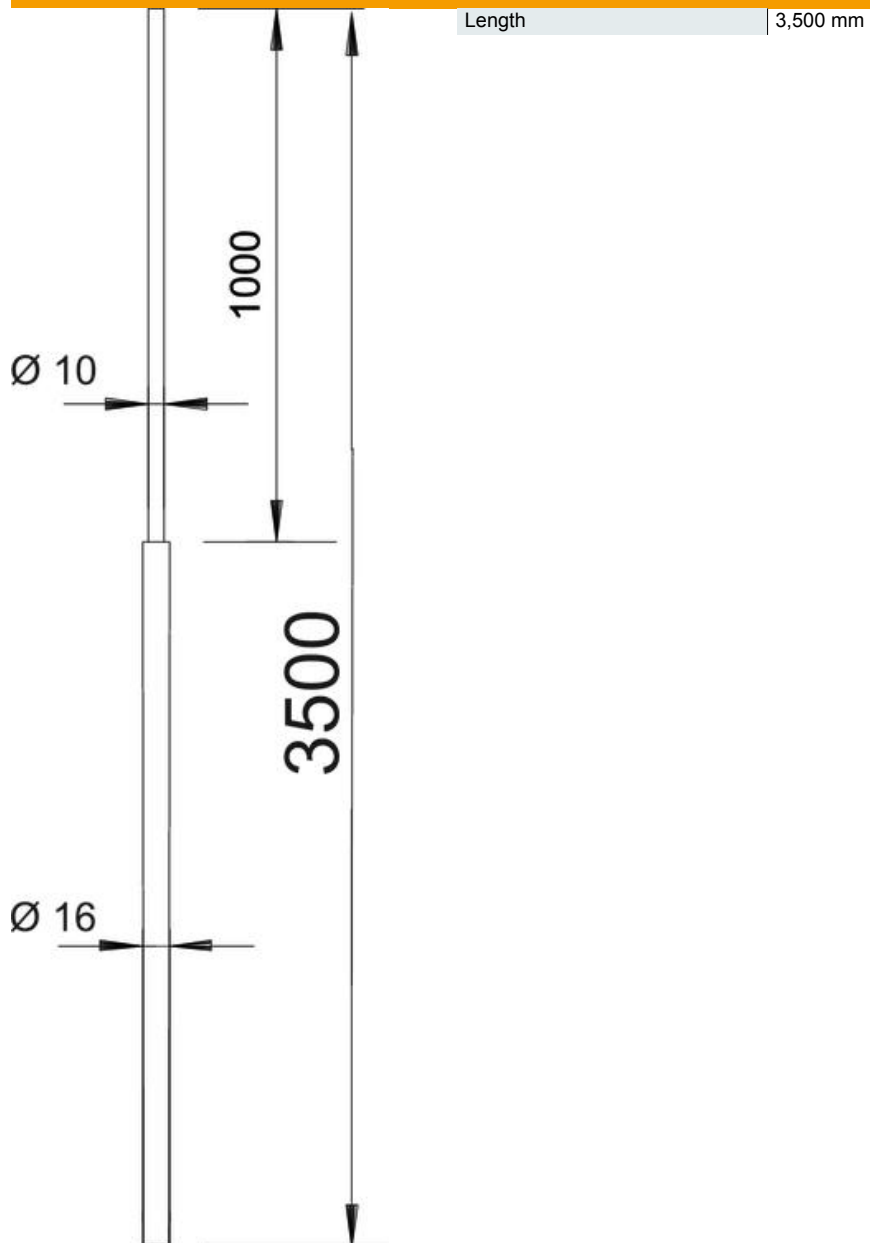

Technical data

| | |
|-------------|-----------------------------|
| Connection | Round conductor |
| Version for | Tapered air-termination rod |

Technical data sheet

Tapered pipe air-termination rod

Item number: 5401993



Technical data

| | |
|-------------------------------------------|----------|
| High voltage-resistant, insulated version | no |
| Nominal size Ø | 10/16 mm |