


# Technical data sheet

## Flat conductor terminal from FL 30 for 1801 VDE

Item number: 5015774

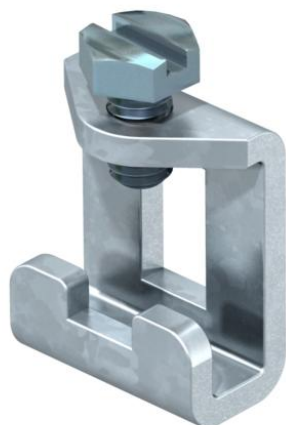

- For flat conductors from FL 30
- 2 terminals always required for each flat conductor connection
- Lightning current carrying capacity 100 kA (10/350)
- Electrogalvanized steel



**St** Steel

**G** Electrogalvanized

### Master data

Item number	5015774
Type	1801 RK40
Description 1	Series terminal
Description 2	for equipotential busbar
Manufacturer	OBO
Dimension	40mm
Material	Steel
Surface	Electrogalvanized
Surface standard	EN ISO 19598 / EN ISO 4042
Smallest sales unit	1
Unit of quantity	Piece
Weight	7.3 kg
Weight unit	kg/100 pc.



# Technical data sheet

Flat conductor terminal from FL 30 for 1801 VDE



Item number: 5015774



## Dimensions



Width 30 mm



## Technical data

Connection options	FL 40 x 5
Suitable for ribbon conductor connection	yes
Suitable for round cable connection	no
Suitable for sector conductor connection	no
Dividing unit TE (10 mm)	5
Suitable for busbar	Other