

Technical data sheet

Diagonal connector with intermediate plate, for A2 round conductor

Item number: 5001612



- Meets the requirements of VDE 0185-305-3 (IEC/ EN 62305-3)
- To connect round conductors 8–10 mm
- Mounted with 2 truss-head bolts M10 x 30 and 2 hexagonal bolts M10
- With adapter plate



A2 Stainless steel

Master data

| | |
|---------------------|----------------------|
| Item number | 5001612 |
| Type | 2760 8 |
| Description 1 | Connection clamp |
| Description 2 | for round conductors |
| Manufacturer | OBO |
| Dimension | RD 8 |
| Material | Stainless steel |
| Smallest sales unit | 5 |
| Unit of quantity | Piece |
| Weight | 27.12 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Diagonal connector with intermediate plate, for A2 round conductor


Item number: 5001612



Dimensions



Dimension A | 101 mm

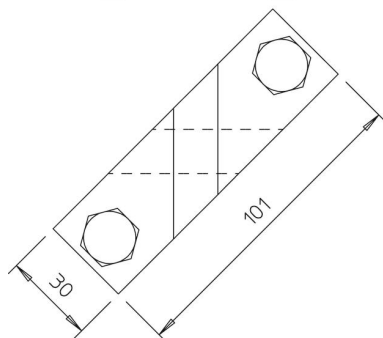

Technical data

| | |
|-------------------------------------|-----------------------------------|
| Type of fastening screw | Gutter bolt |
| Type of connector | Connectors |
| Lightning current carrying capacity | H/100 kA |
| Suitable for connection | Round conductor Rd 8–10 / Rd 8–10 |
| Fit | Rd 8-10 mm |
| Intermediate plate | no |
| Clamping range, max. | 10 mm |
| Clamping range, min. | 8 mm |