Technical data sheet

Deskbox DBV, 2 sockets, VGA, mini jack, 2x RJ45 Cat. 6

Item number: 6116886





Lowerable Deskbox with connection cable for fixed installation on a tabletop, plastic fastening sleeve, painted accordingly in cover shade. It is mounted using a drill hole (\emptyset 102 mm) in the tabletop.

Equipment:

- Two black protection contact sockets in 60° connection direction, incl. 3.0 m power cable with angular connector CEE 7/7.
- One VGA 15-pin HDD socket, incl. 3.0 m connection cable with connector.
- One audio jack socket 3.5 mm, incl. 3.0 m connection cable with connector.
- Two data technology couplings RJ45 to RJ45, 1:1 switched, Cat. 6 shielded.

Note: Can be used in tabletops of up to 50 mm thickness. The ready-for-connection type DBV Deskbox is particularly suitable for the direct supply of workstations with energy, communication and data technology connections.



EL Anodised


Master data

Item number	6116886
Туре	DBV-MA3A D3S2K
Description 1	Deskbox, lowerable
Description 2	for installation in table tops
Manufacturer	OBO
Colour	Aluminium
Material	Aluminium
Surface	Anodised
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	118.23 kg
Weight unit	kg/100 pc.

Technical data sheet

Deskbox DBV, 2 sockets, VGA, mini jack, 2x RJ45 Cat. 6

Item number: 6116886

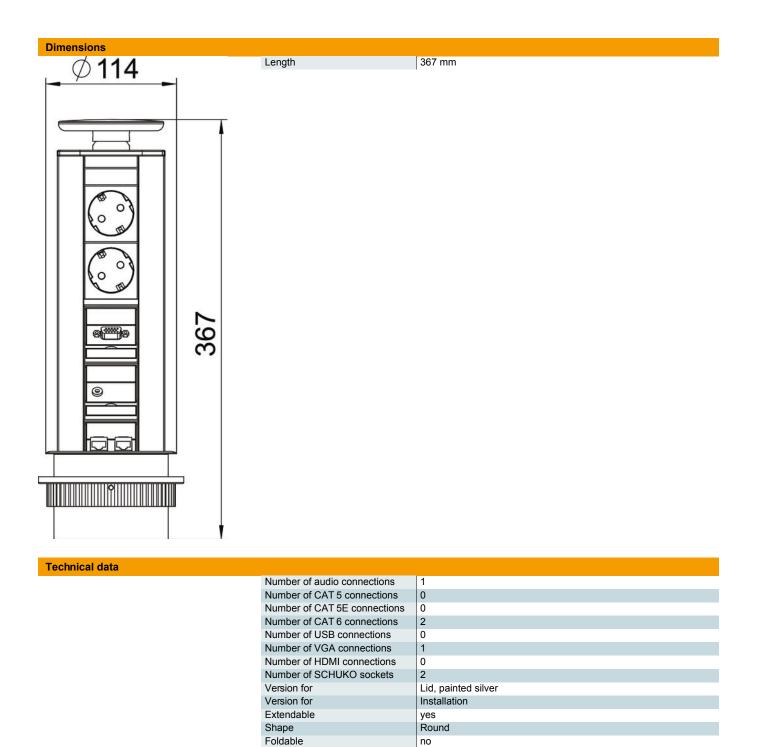



Technical data sheet

Deskbox DBV, 2 sockets, VGA, mini jack, 2x RJ45 Cat. 6



Item number: 6116886

Technical data

Length of the supply cable Surge protection

3 m no