### **Technical data sheet**

## Data technology support, 1 module, straight outlet, type PA



**Item number: 6119230** 



Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connecti-

on modules in the mounting opening.

The type PA data technology support is suitable for accepting the following data connection modules: Panduit: Mini-Com.

For installation in Rapid 45 and Rapid 80 device installation trunking, ISS service

poles and underfloor systems.

Polycarbonate

#### Master data


| Item number         | 6119230                        |
|---------------------|--------------------------------|
| Type                | DTG-2PA AL1                    |
| Description 1       | Data technology support        |
| Description 2       | f. 2 connection modules type P |
| Manufacturer        | OBO                            |
| Dimension           | 45x45mm                        |
| Colour              | Aluminium painted              |
| Material            | Polycarbonate                  |
| Smallest sales unit | 1                              |
| Unit of quantity    | Piece                          |
| Weight              | 1.1 kg                         |
| Weight unit         | kg/100 pc.                     |
|                     |                                |

## **Technical data sheet**

# Data technology support, 1 module, straight outlet, type PA



**Item number: 6119230** 

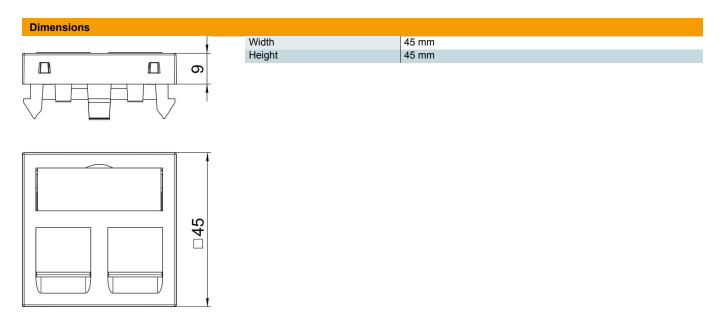

|  |  |  |  | ta |
|--|--|--|--|----|
|  |  |  |  |    |

| Surface version Matt Fastening type Lock Labelling panel With labelling panel Halogen-free yes Hinged cover no Lamp-wire connector no With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no |                      |  |
|---|----------------------|--|
| Labelling panel With labelling panel Halogen-free yes Hinged cover no Lamp-wire connector no With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no  | Surface version      | Matt                                   |
| Halogen-free yes Hinged cover no Lamp-wire connector no With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no   | Fastening type       | Lock                                   |
| Hinged cover no Lamp-wire connector no With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no  | Labelling panel      | With labelling panel                   |
| Lamp-wire connector no With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no  | Halogen-free         | yes                                    |
| With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no   | Hinged cover         | no                                     |
| With dust protection yes  Mounting opening Type PA  Protection rating IP20  Depth 9 mm  Support ring no   | Lamp-wire connector  | no                                     |
| Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no  | With printed label   | no                                     |
| Protection rating IP20 Depth 9 mm Support ring no   | With dust protection | yes                                    |
| Depth 9 mm<br>Support ring no   | Mounting opening     | Type PA                                |
| Support ring no   | Protection rating    | IP20                                   |
| •   | Depth                | 9 mm                                   |
|   | Support ring         | no                                     |
| Transparent no  | Transparent          | no                                     |
| Use Installable data connector  | Use                  | Installable data connector             |
| Strain relief option no   | Strain relief option | no                                     |
| Combination Basic element with central cover plate  | Combination          | Basic element with central cover plate |