### **Technical data sheet**

### Data technology support, 1 module, straight outlet, type PA



**Item number: 6119226** 



Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connecti-

on modules in the mounting opening.

The type PA data technology support is suitable for accepting the following data connection modules: Panduit: Mini-Com.

For installation in Rapid 45 and Rapid 80 device installation trunking, ISS service

poles and underfloor systems.

Polycarbonate

#### Master data


| Item number         | 6119226                        |  |  |
|---------------------|--------------------------------|--|--|
| Туре                | DTG-2PA RW1                    |  |  |
| Description 1       | Data technology support        |  |  |
| Description 2       | f. 2 connection modules type P |  |  |
| Manufacturer        | OBO                            |  |  |
| Dimension           | 45x45mm                        |  |  |
| Colour              | Pure white; RAL 9010           |  |  |
| Material            | Polycarbonate                  |  |  |
| Smallest sales unit | 1                              |  |  |
| Unit of quantity    | Piece                          |  |  |
| Weight              | 1.1 kg                         |  |  |
| Weight unit         | kg/100 pc.                     |  |  |

# **Technical data sheet**

# Data technology support, 1 module, straight outlet, type PA



**Item number: 6119226** 

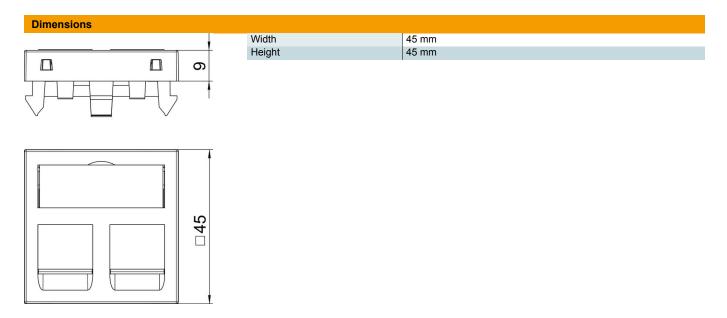

|  |  |  |  | ta |
|--|--|--|--|----|
|  |  |  |  |    |

|                      | ·                                      |  |
|----------------------|--|--|
| Number of units      | 1                                      |  |
| Surface version      | Matt                                   |  |
| Fastening type       | Lock                                   |  |
| Labelling panel      | With labelling panel                   |  |
| Halogen-free         | yes                                    |  |
| Hinged cover         | no                                     |  |
| Lamp-wire connector  | no                                     |  |
| With printed label   | no                                     |  |
| With dust protection | yes                                    |  |
| Mounting opening     | Type PA                                |  |
| Protection rating    | IP20                                   |  |
| Depth                | 9 mm                                   |  |
| Support ring         | no                                     |  |
| Transparent          | no                                     |  |
| Use                  | Installable data connector             |  |
| Strain relief option | no                                     |  |
| Combination          | Basic element with central cover plate |  |
|                      |  |  |