

# Technical data sheet

Flat angle, asymmetrical, falling, for device installation  
trunking Rapid 80 type GA-A70170  
Item number: 6279433



Flat angle, falling, for changing the direction of the Rapid 80 GA aluminium device installation trunking.

The visible surfaces of the fittings are laminated. The cover must be ordered separately.



- Alu** Aluminium
- EL** Anodised

## Master data


|                     |                      |
|---------------------|----------------------|
| Item number         | 6279433              |
| Type                | GA-AFF70170EL        |
| Description 1       | Flat angle           |
| Description 2       | asymmetrical falling |
| Manufacturer        | OBO                  |
| Dimension           | 70x170x300           |
| Material            | Aluminium            |
| Surface             | Anodised             |
| Surface standard    |                      |
| Smallest sales unit | 1                    |
| Unit of quantity    | Piece                |
| Weight              | 132.6 kg             |
| Weight unit         | kg/100 pc.           |

# Technical data sheet

Flat angle, asymmetrical, falling, for device installation  
trunking Rapid 80 type GA-A70170  
Item number: 6279433



## Dimensions

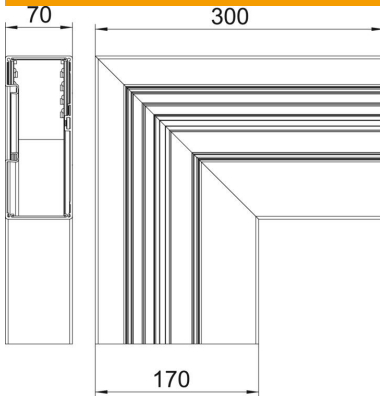

|        |        |
|--------|--------|
| Length | 300 mm |
| Width  | 170 mm |
| Height | 70 mm  |

## Technical data

|                                   |                   |
|-----------------------------------|-------------------|
| Number of covers                  | 1                 |
| Version for                       | Base              |
| for duct width                    | 170 mm            |
| for trunking height               | 70 mm             |
| Halogen-free                      | yes               |
| Cable retaining clip              | no                |
| Duct connector                    | no                |
| Cover mounting type               | Internal          |
| Mounting perforation in base      | no                |
| Cover width                       | 76.5 mm           |
| Change of direction               | Vertical, falling |
| Protection rating                 | IP30              |
| Protective film                   | yes               |
| Protection rating IK code         | IK10              |
| Symmetrical                       | no                |
| Permitted temperature range, max. | 60 °C             |
| Permitted temperature range, min. | -25 °C            |
| Angle range, min.                 | 90 mm             |