

# Technical data sheet

Device installation trunking Rapid 80, trunking width 130,  
trunking height 90, symmetrical  
Item number: 6277302



GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Over-lengths of up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.



St Steel

## Master data


Item number	6277302
Type	GS-S90130LGR
Description 1	Device installation trunking
Description 2	symmetrical
Manufacturer	OBO
Dimension	90x130x2000
Colour	Light grey; RAL 7035
Material	Steel
Smallest sales unit	2
Unit of quantity	Metre
Weight	321 kg
Weight unit	kg/100 m

# Technical data sheet

Device installation trunking Rapid 80, trunking width 130, trunking height 90, symmetrical  
Item number: 6277302



## Dimensions

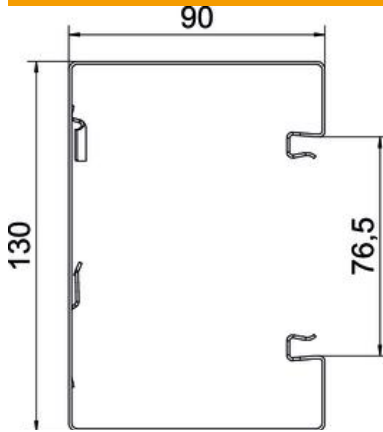

Length	2,000 mm
Width	130 mm
Height	90 mm

## Technical data

Number of covers	1
Number of insertable partitions	1
Rear panel version (inner side)	With locking lugs
Rectangular shape	yes
Base perforation	with base perforation
Halogen-free	yes
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	yes
Usable cross-section	10050 mm <sup>2</sup>
Cover supplied	no
Cover width	76.5 mm
Protective film	yes
Symmetrical	yes