Technical data sheet Service pole, type ISSOGHS70140

Item number: 6289096





ISS aluminium service pole with a 76.5 mm system opening.

Set consists of:

1 single-compartment pole with stand

Total length: 675 mm

1 aluminium cover

Length: 675 mm

The design of this ISS service pole is based on the oval-shaped aluminium profile of ISSOG70140 floor-ceiling poles. The 76.5 mm system opening is suitable for directly accepting mounting box accessories of series 71GD... for the equipment with switching and connection devices.



Alu	Aluminium
EL	Anodised


Master data

Item number	6289096
Туре	ISSOGHS70140EL
Description 1	Service pole
Description 2	floor
Manufacturer	OBO
Dimension	675x146x65
Material	Aluminium
Surface	Anodised
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	220.5 kg
Weight unit	kg/100 pc.

Technical data sheet Service pole, type ISSOGHS70140

Item number: 6289096



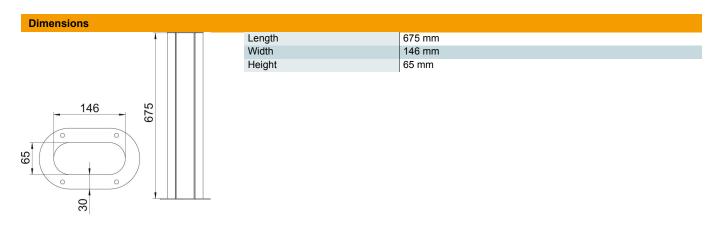

Technical data

Number of usable covers1Number of compartments1 St.Version forSingle-sidedFastening typeStandFloor mountingyesCeiling mountingnoContinuous profileyesHalogen-freeyesCable entryBottomCover width76.5 mmChanges according to locationnoPole height, min.675 mmAdjustablenoPre-wiredno		
Version forSingle-sidedFastening typeStandFloor mountingyesCeiling mountingnoContinuous profileyesHalogen-freeyesCable entryBottomCover width76.5 mmChanges according to locationnoPole shapeOvalPole height, min.675 mmAdjustableno	Number of usable covers	1
Fastening typeStandFloor mountingyesCeiling mountingnoContinuous profileyesHalogen-freeyesCable entryBottomCover width76.5 mmChanges according to locationnoPole shapeOvalPole height, min.675 mmAdjustableno	Number of compartments	1 St.
Floor mountingyesCeiling mountingnoContinuous profileyesHalogen-freeyesCable entryBottomCover width76.5 mmChanges according to locationnoPole shapeOvalPole height, min.675 mmAdjustableno	Version for	Single-sided
Ceiling mountingnoContinuous profileyesHalogen-freeyesCable entryBottomCover width76.5 mmChanges according to locationnoPole shapeOvalPole height, min.675 mmAdjustableno	Fastening type	Stand
Continuous profileyesHalogen-freeyesCable entryBottomCover width76.5 mmChanges according to locationnoPole shapeOvalPole height, min.675 mmAdjustableno	Floor mounting	yes
Halogen-freeyesCable entryBottomCover width76.5 mmChanges according to locationnoPole shapeOvalPole height, min.675 mmAdjustableno	Ceiling mounting	no
Cable entryBottomCover width76.5 mmChanges according to locationnoPole shapeOvalPole height, min.675 mmAdjustableno	Continuous profile	yes
Cover width76.5 mmChanges according to locationnoPole shapeOvalPole height, min.675 mmAdjustableno	Halogen-free	yes
Changes according to location no Pole shape Oval Pole height, min. 675 mm Adjustable no	Cable entry	Bottom
Pole shape Oval Pole height, min. 675 mm Adjustable no	Cover width	76.5 mm
Pole height, min. 675 mm Adjustable no	Changes according to location	no
Adjustable no	Pole shape	Oval
	Pole height, min.	675 mm
Pre-wired no	Adjustable	no
	Pre-wired	no