

Technical data sheet

Height-adjustable cassette for inspection opening, RKR-NUZD3, brass

Item number: 7409134



Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size R4 in dry or wet-cleaned floors for indoor use, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG..R4 or in UGD250-3R4 or UGD350-3R4. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings. Height-adjustable cassette as a blind cassette, two-compartment. 2 APMT2 cover plates can be installed. For the installation of 2 UT3 universal supports for 4 individual installation devices with support ring/support clamp or 6 Modul 45 devices.



CuZn
37 Brass

Master data

| | |
|---------------------|-----------------|
| Item number | 7409134 |
| Type | RKRN2UZD3R4MS25 |
| Description 1 | Round cassette |
| Description 2 | blank |
| Manufacturer | OBO |
| Dimension | Ø215mm |
| Material | Brass |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 197 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Height-adjustable cassette for inspection opening, RKR-NUZD3, brass

Item number: 7409134



Dimensions

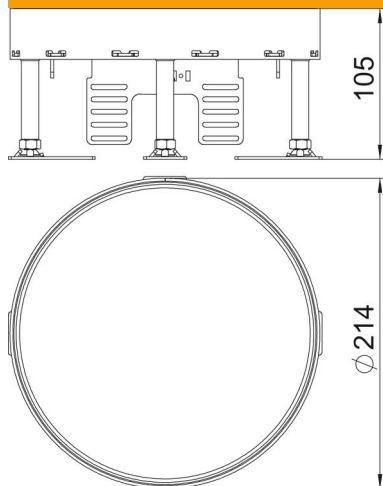

| | |
|--------|--------|
| Length | 214 mm |
| Width | 214 mm |
| Height | 94 mm |

Technical data

| | |
|--|------------|
| Number of installable devices | 0 |
| Number of cable outlets | 0 |
| Version for | Round |
| Floor care | Wet |
| Decouplable | yes |
| Floor height, min. | 94 mm |
| Suitable for raised floor installation | no |
| Suitable for cavity floor installation | no |
| Suitable for underfloor box | 250/350 |
| Device support to accept mounting boxes | no |
| Nominal size for device installation units | R4 |
| Protection rating (IP) when used | IP00 |
| Protection rating (IP) when unused | IP44 |
| Protection rating IK code | IK10 |
| Heavy-duty version | no |
| Installation system type | UT3 |
| Vertical load, large area | to 5,000 N |
| Vertical load, small area | to 3,000 N |
| Approvals | VDE |
| Floor covering thickness | 25 mm |