

# Technical data sheet

Socket 33°, Connect 45, protective contact, double, black-grey

Item number: 6120490



Power socket with side connection Double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

For installation in Rapid 45 ducts, device installation ducts, installation columns, underfloor systems and Deskboxes.



PC Polycarbonate

## Master data

|                     |                                |
|---------------------|--------------------------------|
| Item number         | 6120490                        |
| Type                | STD-D3C SWGR2                  |
| Description 1       | Socket 33°, double             |
| Description 2       | protective contact, Connect 45 |
| Manufacturer        | OBO                            |
| Dimension           | 250V, 10/16A                   |
| Colour              | Black-grey; RAL 7021           |
| Material            | Polycarbonate                  |
| Smallest sales unit | 1                              |
| Unit of quantity    | Piece                          |
| Weight              | 8.5 kg                         |
| Weight unit         | kg/100 pc.                     |


# Technical data sheet

Socket 33°, Connect 45, protective contact, double, black-grey


Item number: 6120490



## Dimensions

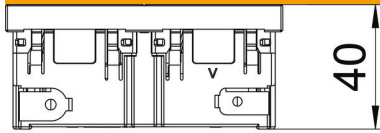

|        |       |
|--------|-------|
| Width  | 90 mm |
| Height | 45 mm |

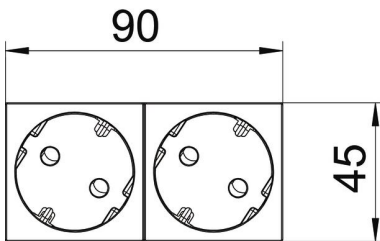

## Technical data

|  |                          |
|--|--------------------------|
| Cover  | Central plate            |
| Closable   | no                       |
| Connection type                                  | Screwless terminal       |
| Number of units                                  | 2                        |
| Number of modules (for modular construction)     | 2                        |
| Number of switchable sockets                     | 0                        |
| Number of poles                                  | 2                        |
| Printed label/coding                             | Without printing         |
| Version for                                      | Double 33°               |
| Surface version                                  | Matt                     |
| Version for                                      | SCHUKO                   |
| Ejection mechanism                               | no                       |
| Fastening type                                   | Lock                     |
| Labelling panel                                  | no                       |
| Operating temperature, max.                      | 40 °C                    |
| Operating temperature, min.                      | -5 °C                    |
| increased touch protection                       | yes                      |
| Error current protection                         | no                       |
| For more difficult conditions (according to VDE) | no                       |
| Halogen-free                                     | yes                      |
| Insulated installation                           | no                       |
| Hinged cover                                     | no                       |
| Coding   | no                       |
| Warning light                                    | no                       |
| With on/off switch                               | no                       |
| With fine-wire fuse                              | no                       |
| With functional lighting                         | no                       |
| With orientation lighting                        | no                       |
| Mounting type                                    | Device installation duct |
| Nominal voltage                                  | 250 V                    |

# Technical data sheet

Socket 33°, Connect 45, protective contact, double, black-grey

Item number: 6120490



## Technical data

|                        |                              |
|------------------------|------------------------------|
| Nominal current        | 16 A                         |
| Protection rating      | Other                        |
| Special power supply   | Without special power supply |
| Socket version         | Protective contact           |
| Socket angle           | 33°                          |
| Depth                  | 40 mm                        |
| Transparent            | no                           |
| Rotated central insert | yes                          |
| Surge protection       | no                           |