

# Technical data sheet

0° socket, Multistandard, single

Item number: 6120739



Socket, single 0°, multi-standard version, with increased touch protection, with screw terminals, 2-pin, 5/6/10/13 A, 250 V~.  
This socket may not be used in Europe. Country-specific standards and directives must be observed.




PC Polycarbonate

## Master data

|                     |                      |
|---------------------|----------------------|
| Item number         | 6120739              |
| Type                | STD-MS0 SWGR1        |
| Description 1       | Socket 0°, single    |
| Description 2       | Multi standard       |
| Manufacturer        | OBO                  |
| Colour              | Black-grey; RAL 7021 |
| Material            | Polycarbonate        |
| Smallest sales unit | 1                    |
| Unit of quantity    | Piece                |
| Weight              | 3.95 kg              |
| Weight unit         | kg/100 pc.           |

## Dimensions

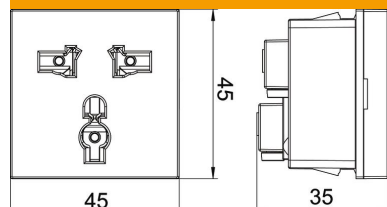

|        |       |
|--------|-------|
| Width  | 45 mm |
| Height | 45 mm |

# Technical data sheet

0° socket, Multistandard, single

Item number: 6120739



## Technical data

|  |                              |
|--|------------------------------|
| Cover  | Central plate                |
| Closable   | no                           |
| Connection type                                  | Screw terminal               |
| Number of units                                  | 1                            |
| Number of switchable sockets                     | 0                            |
| Number of poles                                  | 2                            |
| Printed label/coding                             | Without printing             |
| Version for                                      | Single 0°                    |
| Surface version                                  | Not applicable               |
| Version for                                      | Multistandard socket         |
| Ejection mechanism                               | no                           |
| Fastening type                                   | Lock                         |
| Labelling panel                                  | no                           |
| Operating temperature, max.                      | 40 °C                        |
| Operating temperature, min.                      | -5 °C                        |
| increased touch protection                       | yes                          |
| Error current protection                         | no                           |
| For more difficult conditions (according to VDE) | no                           |
| Halogen-free                                     | no                           |
| Hinged cover                                     | no                           |
| Warning light                                    | no                           |
| With on/off switch                               | no                           |
| With fine-wire fuse                              | no                           |
| With functional lighting                         | no                           |
| With orientation lighting                        | no                           |
| Mounting type                                    | Device installation duct     |
| Nominal voltage                                  | 250 V                        |
| Protection rating                                | Other                        |
| Special power supply                             | Without special power supply |
| Socket angle                                     | 0°                           |
| Depth  | 35 mm                        |
| Transparent                                      | no                           |
| Rotated central insert                           | no                           |
| Surge protection                                 | no                           |