

Technical data sheet


UDHOME2 floor socket, with tube body, freely equippable,
stainless steel

Item number: 7427095



Square floor socket for use in wet-care cavity and screed floors in indoor areas. Installation housing with pre-marked insertion openings for empty pipelines (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.

Up to two Modul45® sockets can be installed. Up to two modular data sockets (Keystones) can be installed with optional mounting supports. The load-bearing capacity of 15 kN is only guaranteed when in an unused state.

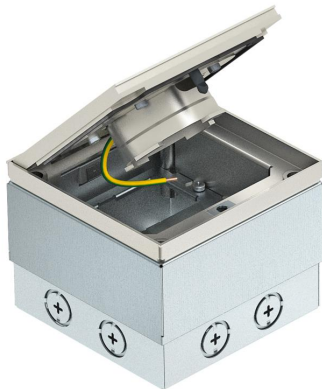

A2 Stainless steel

Master data

Item number	7427095
Type	UDHOME2 VF
Description 1	Floor socket, complete
Description 2	with tube, empty for 2 Modul46
Manufacturer	OBO
Dimension	140x140x110
Material	Stainless steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	315 kg
Weight unit	kg/100 pc.


Technical data sheet

UDHOME2 floor socket, with tube body, freely equippable,
stainless steel

Item number: 7427095



Dimensions

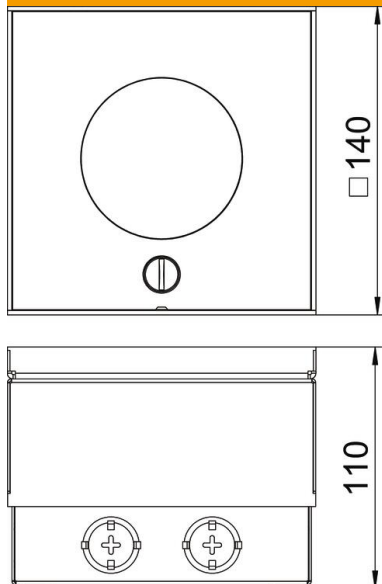

Length	140 mm
Width	140 mm
Dimension h	110 mm

Technical data

Number of mounting boxes	0
Version for	Square
Cable outlet version	Lowerable tube body
Floor covering protection frame	no
Floor care	Wet
Seal installation option	yes
Floor height, max.	130 mm
Floor height, min.	110 mm
Suitable for raised floor installation	yes
Suitable for cavity floor installation	yes
Suitable for wet care	yes
Suitable for underfloor ducts	yes
Device support to accept mounting boxes	no
Length of external dimensions	140 mm
Length of installation dimensions	140 mm
With floor covering recess	no
Protection rating (IP) when unused	IP45
Opening mechanism	Sash lock