

# Technical data sheet

UDHOME2 floor socket, with floor covering recess in stainless steel lid, equipped  
Item number: 7368399



Square floor socket with floor covering recess for use in dry-care cavity and screed floors in indoor areas. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.

Surfaces made of stainless steel and visible in the floor covering. The load-bearing capacity of 15 kN is only guaranteed when in an unused state. The scope of delivery contains a double protective contact socket. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.



A2 Stainless steel

## Master data


Item number	7368399
Type	UDHOME2 V V
Description 1	Floor socket, complete
Description 2	double VDE socket
Manufacturer	OBO
Dimension	125x125x110
Material	Stainless steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	210 kg
Weight unit	kg/100 pc.

# Technical data sheet

UDHOME2 floor socket, with floor covering recess in stainless steel lid, equipped  
Item number: 7368399



## Dimensions

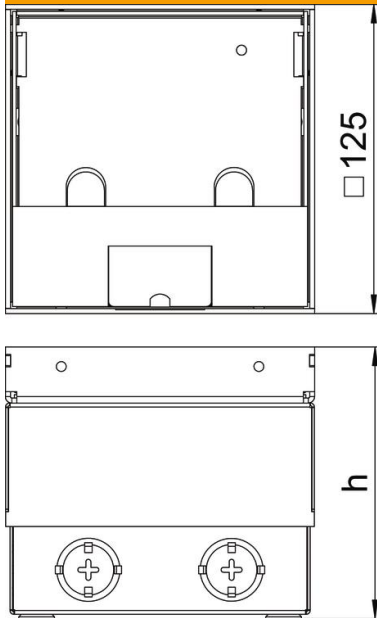

Dimension h	110 mm
-------------	--------

## Technical data

Version for	Square
Cable outlet version	Swivellable cord outlet
Floor covering protection frame	no
Floor care	Dry
Floor height, max.	130 mm
Floor height, min.	110 mm
Suitable for raised floor installation	no
Suitable for cavity floor installation	yes
Suitable for wet care	no
Suitable for underfloor ducts	yes
Length of external dimensions	125 mm
Length of installation dimensions	125 mm
With floor covering recess	yes
Height-adjustment range, max.	130 mm
Height-adjustment range, min.	110 mm
Opening mechanism	Tool
Floor covering thickness	15 mm