

# Technical data sheet

## Installation socket, 1.5 empty

Item no. 7408836



Installation socket for GES R2 floor socket for mounting in UD GES R2 screed socket and in raised floor plates with an installation opening diameter of 122 mm.

Included in the delivery is a cover plate for the installation of 1.5x Modul 45 sockets (BS, SA). Up to two modular data sockets (Keystones) can be installed with optional mounting plate.




**PA** Polyamide

### Master data

Item no.	7408836
Type	MT R2 1.5
Description 1	Mounting support for GES R2
Description 2	for 1.5x Modul 45
Colour	Graphite black
RAL number	9011
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	1 Piece
Weight	19,50 kg/100 pc.

### Technical data

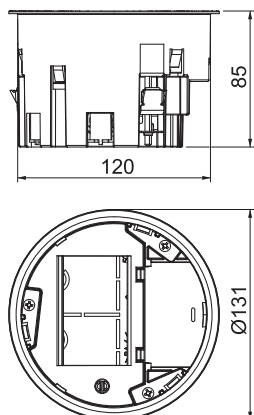

External diameter	131,00 mm
Installation diameter	122
Number of installable devices	2
Number of strain reliefs	1
Floor covering protection frame	<input type="checkbox"/>
Cover version	Round
Seal installation option	<input checked="" type="checkbox"/>
Installation depth	85,00 mm
Device type	Grid 45
Device support to accept mounting boxes	<input type="checkbox"/>
Suitable for wet care	<input type="checkbox"/>
Suitable for raised floor installation	<input checked="" type="checkbox"/>
Suitable for cavity floor installation	<input checked="" type="checkbox"/>
Suitable for underfloor ducts	<input type="checkbox"/>
Installation technology	Grid M45
With floor covering recess	<input type="checkbox"/>
Strain relief option	<input checked="" type="checkbox"/>