

Technical data sheet

Combination arrester V25, 3-pole 280 V with remote signalling

Item number: 5094490



Combination arrester, lightning and surge arrester type 1+2

- Complete unit consisting of upper part and base, pre-mounted and ready for connection
- Suitable for TN networks
- With remote signalling and potential-free NO contact for function monitoring
- Voltage protection level < 0.9 kV
- Plug-in arrester with dynamic cut-off unit
- Visual function display
- Encapsulated, non-extinguishing zinc oxide varistor arrester for use in standard distributor housings
- Labelled connections
- FS variant with remote signalling contact (potential-free NO contact)

Application example: Buildings with open-wire power supply or for setting up lightning protection equipotential bonding in residential buildings.

* Complete = Top and bottom section

With alarm system (potential-free change-over contact FS)



Master data

Item number	5094490
Type	V25-B+C 3-FS280
Description 1	CombiController V25
Description 2	3-pole with remote signalling
Manufacturer	OBO
Dimension	280V
Smallest sales unit	1
Unit of quantity	Piece
Weight	42.7 kg
Weight unit	kg/100 pc.


Technical data sheet

Combination arrester V25, 3-pole 280 V with remote signalling

Item number: 5094490



Technical data

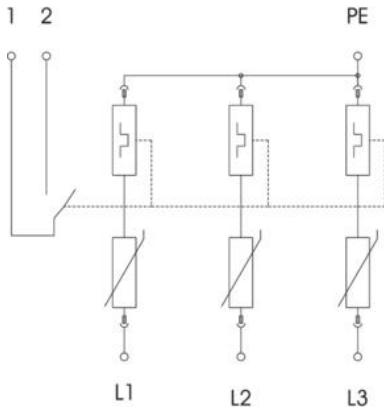

Arrester surge current (8/20 μ s) [total]	90 kA
Response time	<25 ns
Blow-out	no
Version for	3-pole with FS
Pole version	3
Structural width in division units (division unit, 17.5 mm)	3
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Lightning surge current (10/350 μ s)	7 kA
Lightning surge current (10/350)	21 kA
Remote signalling	yes
Maximum continuous voltage AC	280
Maximum continuous voltage DC	200
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	2.5 mm ²
Lightning protection zone LPZ	0→2
Max. mains-side overcurrent protection	160
Maximum back-up fuse	160 A
Maximum discharge current (8/20 μ s)	50 kA
Nominal discharge current (8/20 μ s)	30 kA
Nominal discharge current (8/20 μ s) [L-N]	30 kA
Nominal discharge current (8/20 μ s) [N-PE]	30 kA
Nominal voltage AC (50/60 Hz)	230 V
Network form	Other
TN network form	yes
TN-C network form	yes
Pole number	3
Protection rating	IP20
Protection level	$\leq 0,9$
Signalling on device	Visual
SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-1	Class I+II